

Patron



The entire Patron series is exceptionally appealing because of its low weight and high breaking strength. Due to the high strength and the low danger of breaking, Patron ropes are the right choice for many different applications. The high-twist 32-strand mantle braid provides for high dirt resistance, better grip and high abrasion protection.



Features

- Lightweight
- High breaking load
- Excellent grip and handling


Specifications

Core: Nylon
Cover: Nylon
Standard: EN 1891 B (9mm)
 EN 1891 A (10mm, 10.5mm, 11mm, 12mm)
Braid: 32



Certifications

- 10.5mm certified with CT Easy Speed and SKR2 according to EN353-2
- 11.0mm certified with PETZL ASAP (B71, B71AAA, B071AA00), only with ASAP'Sorber 20+40 or Absorbica according to EN 353-2
- 11.0mm certified with PETZL ASAP LOCK (B071BAA00) in use with ASAP'Sorber AXESS according to EN 353-2
- 11.0mm certified with Anthon DSD+ and CT Sparrow 200R according to EN341-2A
- 12.0mm certified with Teufelberger Ropstop 3 according to EN 353-2

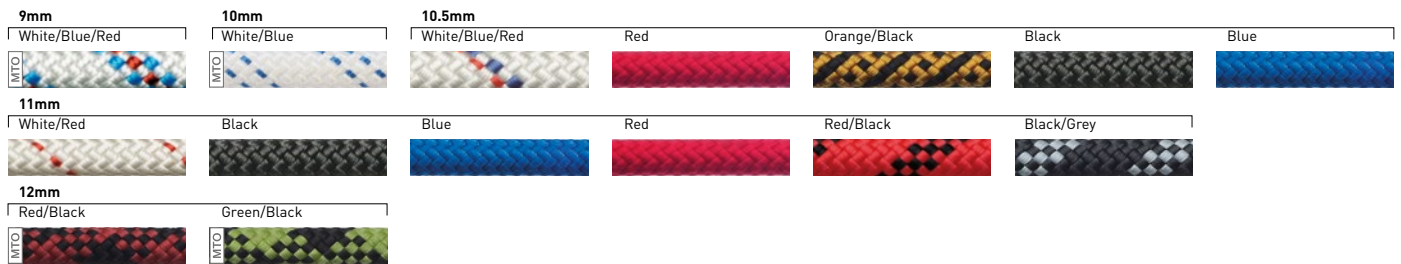

CE test results per EN 1891

Ø	Weight		Shrinkage %	Elongation 50-150 kg %	Min. breaking strength				Cover			
	mm	inch			g/m	lbs/100'	Free length daN	Free length lbf	With figure 8 knot daN	With figure 8 knot lbf	Sewn daN	Sewn lbf
9.0	23/64	51.0	3.43	3.0	3.0	2,000	4,495	1,300	2,920	-	-	41.0
10.0	3/8	66.0	4.44	3.0	3.0	2,900	6,515	1,600	3,595	2,500	5,620	38.0
10.5	13/32	72.0	4.84	4.0	3.0	3,200	7,190	1,800	4,045	2,600	5,845	37.0
11.0	7/16	75.0	5.04	4.0	3.0	3,300	7,415	1,800	4,045	2,700	6,070	36.0
12.0	1/2	92.3	6.19	4.0	3.0	3,800	8,540	2,400	5,395	3,400	7,640	36.0